

REMARKS

Claims 12-22 are pending in this application. By this Preliminary Amendment, Applicant AMENDS the specification and the abstract of the disclosure, CANCELS claims 1-11 and ADDS new claims 12-22.

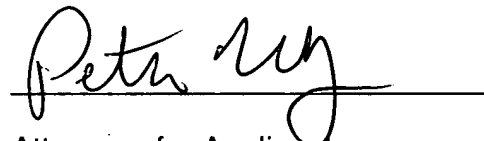
Applicant has attached hereto a Substitute Specification in order to make corrections of minor informalities contained in the originally filed specification. Applicant's undersigned representative hereby declares and states that the Substitute Specification filed concurrently herewith does not add any new matter whatsoever to the above-identified patent application. Accordingly, entry and consideration of the Substitute Specification are respectfully requested.

The changes to the specification have been made to correct minor informalities to facilitate examination of the present application.

Applicant respectfully submit that this application is in condition for allowance. Favorable consideration and prompt allowance are respectfully solicited.

Respectfully submitted,

Date: February 25, 2005

A handwritten signature in dark ink, appearing to read "Peter Medley", is written over a horizontal line.

Attorneys for Applicant
Joseph R. Keating
Registration No. 37,368

Christopher A. Bennett
Registration No. 46,710

Peter Medley
Registration No. 56,125

KEATING & BENNETT, LLP
10400 Eaton Place, Suite 312
Fairfax, Virginia 22030
Telephone: (703) 385-5200
Facsimile: (703) 385-5080

10/526105

BT01 Rec'd PCT/ 25 FEB 2005

MARKED-UP VERSION OF SUBSTITUTE SPECIFICATION

7/8/13

10/526105
BT01 Rec'd PCT/EP 25 FEB 2005

Attorney Docket No. 36856.1327

DESCRIPTION

LINE CONVERTER, HIGH-FREQUENCY MODULE, AND COMMUNICATION DEVICE

BACKGROUND OF THE INVENTION

1. Technical Field Of The Invention

The present invention relates to a line converter for a transmission line used for at least one of a microwave band and a millimeter-wave band, for example, a high-frequency module including the line converter, and a communication device.

2. Description of the Related Art ~~Background Art~~

In the past, line converters for performing line conversion between a plane circuit including~~formed by using~~ a dielectric substrate and a three-dimensional waveguide for propagating an electromagnetic wave in a three-dimensional space have been disclosed in Patent Document 1 (Japanese Unexamined Patent Application Publication No. 60-192401) and Patent Document 2 (Japanese Unexamined Patent Application Publication No. 2001-111310).

In the line converter according to Patent Document 1, an end of a micro-strip line formed as part of the plane circuit is inserted in a terminal short-circuit waveguide tube divided into two parts by a plane E of the waveguide tube. The two parts of

the terminal short-circuit waveguide tube penetrate a groove formed in the dielectric substrate and sandwich the dielectric substrate therebetween.

In the line converter according to Patent Document 2, the dielectric substrate is provided at a position that is spaced away from a short-circuit plane of a terminal short-circuit waveguide tube by as much as a predetermined distance and in a predetermined direction that is perpendicular~~orthogonal~~ to the electromagnetic-wave propagation direction.

In the case of the line converter of Patent Document 1, there is a need to form a penetrating groove in the dielectric substrate, so as to penetrate part of the waveguide tube divided into two parts. Therefore, when~~where~~ the dielectric substrate is formed as a ceramic substrate including aluminum or the like, it becomes difficult to machine the dielectric substrate. Further, coupling of the micro-strip line is achieved at a position where the intensity of electric fields generated by a standing wave generated at a terminal end of the waveguide is high. The coupling characteristic is determined by the positional relationship between the dielectric substrate including the micro-strip line and the waveguide tube. Therefore, the coupling characteristic is affected by the precision of assembling the dielectric substrate and the waveguide tube, which makes it difficult to obtain a line-conversion characteristic according to

a predetermined design without variations.

In the line converter according to Patent Document 2, the dielectric substrate is provided in a predetermined direction that is perpendicular~~orthogonal~~ to the electromagnetic-wave propagation direction of the waveguide tube. Therefore, the positional relationship between the three-dimensional waveguide formed by the waveguide tube and the plane circuit formed by the dielectric substrate is determined with a low degree of flexibility. Subsequently, the plane circuit cannot be provided in a predetermined direction that is parallel to the electromagnetic-wave propagation direction of the waveguide tube.

SUMMARY OF THE INVENTION

In order ~~An object of the present invention is to~~ overcome the problems described above, preferred embodiments of the present invention provide a line converter wherein a plane circuit can be arranged ~~provided~~ in a predetermined direction that is substantially parallel to the direction in which an electromagnetic wave propagates through a three-dimensional waveguide, a dielectric substrate can be easily machined, and the characteristic of coupling between the plane circuit provided ~~formed~~ on the dielectric substrate and the three-dimensional waveguide is prevented from being affected by the precision of assembling the plane circuit and the three-dimensional waveguide

so that a line-conversion characteristic according to a a predetermined design can be easily obtained. The preferred embodiments of the present invention also provide, a high-frequency module including such a unique ~~the~~ line converter, and a communication device.

According to a preferred embodiment of the present invention,

~~Disclosure of Invention~~

~~—— For achieving the above-described object, the present invention provides:~~

~~—— a line converter includes ~~including~~ a three-dimensional waveguide for propagating an electromagnetic wave in a three-dimensional space and a plane circuit having a predetermined conductor pattern disposed ~~formed~~ on a dielectric substrate, so as to perform line conversion between the plane circuit and the three-dimensional waveguide.~~

The line converter is characterized in that the dielectric substrate is arranged ~~provided~~, so as to be substantially parallel to a plane E of the three-dimensional waveguide and at an approximately central portion ~~a nearly center part~~ of the three-dimensional waveguide, and

~~—— the conductor pattern of the dielectric substrate includes a conductor portion defining part ~~forming~~ a shield area of the three-dimensional waveguide, a coupling-line portion ~~part~~ that is electromagnetically coupled to a standing wave that occurs in the~~

shield area, and a transmission-line portion~~part~~ continuing from the coupling-line portion~~part~~.

Thus, a standing wave required for electromagnetically coupling the three-dimensional waveguide to the transmission line on the plane circuit is generated by the shield area defined~~formed~~ by the conductor portion~~part~~ provided on the dielectric substrate. Therefore, the positional -relationship between the conductor portion~~part~~ on the dielectric-substrate side defining~~forming~~ the shield area of the three-dimensional waveguide and the coupling-line portion~~part~~ that is electromagnetically-coupled to the standing wave generated at the shield area is determined only by the precision of forming the conductor pattern on the dielectric substrate. Subsequently, a stable coupling characteristic can be obtained without being affected by the precision of assembling the three-dimensional waveguide and the plane circuit, and a line-conversion characteristic according to a predetermined design can be obtained.

Further, preferred embodiments of the present invention are also~~is~~ characterized in that the conductor portion defining~~part~~ forming the shield area includes ~~is formed,~~ as ground conductors disposed~~formed~~ on both surfaces of the dielectric substrate.

Further, preferred embodiments of the present invention are additionally ~~is~~ characterized by having a plurality of conduction

paths that penetrates the dielectric substrate and that is aligned on at least one of both sides thereof, so as to be spaced away from the transmission line by as much as a predetermined distance, so that conduction is established between the ground conductors located~~formed~~ on the both surfaces of the dielectric substrate.

Further, additional preferred embodiments of the present invention are ~~is~~ characterized in that a conductor of the three-dimensional waveguide is divided into two portions~~parts~~ including an upper portion~~part~~ and a lower portion~~part~~ by a plane that is substantially parallel to the plane E and a space is provided in the conductor of the three-dimensional waveguide, so as to create a choke defined by the space, where the space is provided at a position spaced away from the three-dimensional waveguide by as much as a predetermined distance, so as to be substantially parallel to an electromagnetic-wave propagation direction of the three-dimensional waveguide.

Further, other preferred embodiments of the present invention are~~is~~ characterized by including the line converter and a high-frequency circuit connected to each of the plane circuit and the three-dimensional waveguide of the line converter.

Further, according to another preferred embodiment of the present invention, ~~is characterized by forming~~ a communication device includes~~including~~ the high-frequency module in a unit for

transmitting and receiving an electromagnetic wave.

Other features, elements, steps, characteristics and advantages of the present invention will become more apparent from the following detailed description of preferred embodiments thereof with reference to the attached drawings.

Brief Description of the Drawings

Figs. 1(A)-(C) ~~show~~~~shows~~ sectional views and a plan view of a line converter according to a first preferred embodiment of the present invention.

Figs. ——— Fig. 2(A)-(D) ~~show~~~~shows~~ exploded plan views illustrating the line converter.

Fig. 3 is a sectional view showing an example electric-field intensity distribution of a three-dimensional waveguide illustrating the result of three-dimensional electromagnetic-field analysis simulation for the line converter.

Fig. 4 is a plan view showing the result of three-dimensional electromagnetic-field analysis simulation for the line converter.

Fig. 5 is another plan view showing the result of three-dimensional electromagnetic-field analysis simulation for the line converter.

Figs. 6(A)-(C) ~~illustrate~~~~illustrates~~ a line converter according to a second preferred embodiment of the present

invention.

Figs. 7(A)-(D) show ~~shows~~ exploded plan views of the line converter.

Fig. 8 is a block diagram illustrating a high-frequency module according to a third preferred embodiment of the present invention.

Fig. 9 is a block diagram illustrating a communication device according to a fourth preferred embodiment of the present invention.

DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS~~Best Mode for~~
~~Carrying Out the Invention~~

The configuration of a line converter according to a first preferred embodiment of the present invention will now be described with reference to Figs. 1 to 5.

Fig. 1 shows the configuration of the line converter. Fig. 1(C) is a plan view showing the line converter after an upper conductor plate 2 and an upper dielectric strip 7 are removed therefrom. Fig. 1(A) is a ~~an~~ A-A' sectional view along line A-A' of the line converter shown in Fig. 1(C), where the upper conductor plate 2 is mounted thereon. Fig. 1(B) is a ~~B-B'~~ sectional view along line B-B' of the line converter shown in Fig. 1(C), where the upper conductor plate 2 is mounted thereon, as in the case of Fig. 1(A).

Here, reference numeral 1 denotes a lower conductor plate, reference numeral 2 denotes the upper conductor plate, reference numeral 3 denotes a dielectric substrate, and reference numerals 6 and 7 denote dielectric strips. The dielectric substrate 3 is arranged~~provided~~, so as to be sandwiched between the lower conductor plate 1 and the upper conductor plate 2, and the dielectric strips 6 and 7.

Fig. 2 shows exploded plan views illustrating the configuration of each portion~~part~~ of the line converter shown in Fig. 1. Fig. 2(A) shows the top surface of the upper conductor plate 2, Fig. 2(B) shows the top surface of the dielectric substrate 3, Fig. 2(C) shows a conductor pattern on the undersurface of the dielectric substrate 3, and Fig. 2(D) is a plan view of the lower conductor plate 1.

A three-dimensional-waveguide groove G11 is provided on the lower conductor plate 1 and a three-dimensional-waveguide groove G21 is provided on the upper conductor plate 2. The lower dielectric strip 6 is inserted in the three-dimensional-waveguide groove G11. The upper dielectric strip 7 is inserted in the three-dimensional-waveguide groove G21. By overlaying the two conductor plates 1 and 2 one another, the two dielectric strips 6 and 7 are opposed to each other. Subsequently, a dielectric-filled waveguide (DFWG) (hereinafter simply referred to as a "waveguide") is formed.

A predetermined plane of the waveguide is determined to be a plane E (a conductor plane that is substantially parallel to the electric field of a TE₁₀ mode that is the mode of a propagating electromagnetic wave), where the plane E is substantially parallel to the lower conductor plate 1 and the upper conductor plate 2. Therefore, the dielectric substrate 3 is provided at a position that is substantially parallel to the plane E of the waveguide and corresponding to the approximately central portion~~nearly center part~~ of the waveguide (the portion located~~part~~ between the lower conductor plate 1 and the upper conductor plate 2).

The conductor plates 1 and 2 are preferably formed by machining a metal plate including aluminum or other suitable material~~the like~~, for example. Further, the dielectric strips 6 and 7 are preferably formed by injection-molding or machining a fluoroplastic resin, for example. The dielectric substrate 3 is preferably formed by using a ceramic substrate including aluminum or other suitable material~~the like~~.

A transmission-line conductor 4a and a coupling-line conductor 4k continuing therefrom are provided ~~formed~~ on the undersurface of the dielectric substrate 3 (the side facing the lower conductor plate 1). A ground conductor 5g is disposed ~~formed~~ on the top surface of the dielectric substrate 3 (the side facing the upper conductor plate 2). The transmission-

line conductor 4a ~~located~~formed on the dielectric substrate 3 and the ground conductor 5g ~~located~~formed on the surface facing the transmission-line conductor 4a ~~define~~form a micro-strip line.

A notch ~~portion~~part is ~~provided~~informed on the ground conductor 5g on the top surface of the dielectric substrate 3, as indicated by reference character N shown in Fig. 2(B). The coupling-line conductor 4k facing the notch ~~portion~~part N, the dielectric substrate 3, the lower conductor plate 1, and the upper conductor plate 2 ~~define~~form a suspended line. The transmission-line conductor 4a and the coupling-line conductor 4k are ~~disposed~~formed on the undersurface-side of the dielectric substrate 3 and the ground conductor 4g is ~~located~~formed in a predetermined area that is spaced away from the transmission lines by as much as a predetermined distance.

As shown in Fig. 2(D), the lower conductor plate 1 has a transmission-line groove G12 that is formed thereon and extends along the transmission line 4a. The transmission-line groove G12 provides a predetermined space on the hotline side of the ~~above-described~~ micro-strip line and functions as a shield.

Further, a plurality of conduction paths (via holes) V for achieving continuity between the ground conductors 4g and 5g on the top surface and the undersurface of the dielectric substrate 3 is aligned on both sides of the transmission-line conductor 4a and the coupling-line conductor 4k, so as to be spaced away

therefrom by as much as a predetermined distance. Subsequently, unnecessary coupling between a spurious mode such as a parallel-flat-plate mode generated between parallel flat plates, that is, the upper and lower ground conductors 4g and 5g sandwiching the dielectric substrate 3 therebetween and a micro-strip-line mode generated by the transmission-line conductor 4a and the ground conductor 5g is shielded. Further, unnecessary coupling between a suspended-line mode generated by the coupling-line conductor 4k, the dielectric substrate 3, and the conductor plates 1 and 2 and the ~~above-described~~ spurious mode is shielded. Further, the conduction paths (via holes) V may be aligned on one side of the transmission-line conductor 4a and the coupling-line conductor 4k, so as to be spaced away therefrom by as much as a predetermined distance.

For sandwiching the dielectric substrate 3 having various conductor patterns ~~disposed~~formed thereon between the two conductor plates 1 and 2 in the above-described manner, the dielectric substrate 3 is provided at a predetermined position with respect ~~reference~~ to the conductor plates 1 and 2 so that the coupling-line conductor 4k is inserted in the waveguide in a predetermined direction that is substantially perpendicular~~orthogonal~~ to the electromagnetic-propagation direction of the waveguide. The ground conductors 4g and 5g are arranged~~formed~~ on the dielectric substrate 3 so that a

~~portionpart~~ of each of the ground conductors 4g and 5g is inserted in the waveguide. As shown in Fig. 1, a ~~portionpart~~ of the ground conductors 4g and 5g is designated by reference character S. This ~~portion definespart-forms~~ a shield area of the waveguide. That is to say, by ~~arranging forming~~ a ground conductor substantially parallel to the plane E at the approximately central portionnearly-center-part of the waveguide, the waveguide is divided by the plane that is substantially parallel to the plane E, whereby the shield wavelength of the waveguide is reduced and the shield area is locatedformed in the waveguide. Specifically, the ~~portionpart~~ designated by reference character S functions as a conductor portion definingpart-forming the shield area included in preferred embodiments of the relating to the-present invention.

As shown in Fig. 2(A), the upper conductor plate 2 has a choke groove G22 that is substantially parallel to the electromagnetic-wave propagation direction of the waveguide and that is spaced away from the waveguide (from the three-dimensional-waveguide groove G21) by as much as a predetermined distance. Therefore, where the conductor plate 1 is placed on the upper conductor plate 2, a clearance generated at the interface ~~definesforms~~ a discontinuity ~~portionpart~~. However, an electromagnetic wave that is likely to leak from the clearance is released in the space of the choke groove G22. Where the

distance between a portionpart indicated by reference characters Co and a portionpart indicated by reference characters Cs corresponds to substantially one-fourth of a propagation wavelength in Fig. 1(B), the portionpart Co functions as an open end. Subsequently, the portionpart Cs equivalently functions, as a short-circuit end. Therefore, the radiation loss generated from the clearance created by the two conductor plates 1 and 2 placed on one another hardly occurs.

The positional relationship between the conductor portionpart S defining the~~forming the above-described~~ shield area and the coupling-line conductor 4k depends on the dimensional precision of the conductor pattern with reference to the dielectric substrate 3. The forming precision of the conductor pattern with reference to the dielectric substrate is significantly higher than the assembly precision of the dielectric substrate 3 with reference to the conductors 1 and 2. Therefore, the relative position of a standing wave of the three-dimensional waveguide, where the standing wave occurs by the shield area, with respect to the coupling-line conductor 4k is maintained according to a predetermined design at all times. Subsequently, the characteristic of line-conversion between the waveguide and the plane circuit can be obtained according to the predetermined design at all times.

Next, the result of simulation performed for an example

design will now be described according to Figs. 3 to 5.

The design circumstances are as follows, for example:-

Frequency: 76-GHz band

Width of the three-dimensional waveguide grooves G11 and

G21: $W_g = \text{about } 1.2 \text{ mm}$

Depth of the three-dimensional waveguide grooves G11 and

G21: $H_g = \text{about } 0.9 \text{ mm}$

Dielectric constant of the dielectric strips 6 and 7: 2

Width of the dielectric strips 6 and 7: $W_d = \text{about } 1.1 \text{ mm}$

Height of the dielectric strips 6 and 7: $H_d = \text{about } 0.9 \text{ mm}$

Dielectric constant of the dielectric substrate 3: 10

Thickness of the dielectric substrate 3: $t = \text{about } 0.2 \text{ mm}$

Line width of the transmission-line conductor 4a and the

coupling-line conductor 4k: $W_c = \text{about } 0.2 \text{ mm}$

Fig. 3 shows the result of three-dimensional electromagnetic-field analysis simulation illustrating line conversion between the waveguide and the plane circuit. Further, Fig. 4 shows a cross-sectional view of the waveguide portion.~~part~~. In Fig. 3, white and periodically shown patterns indicate the electric-field intensity distribution. In Fig. 4, ring-like patterns indicate the electric-field-intensity distribution. When comparing Figs. 3, 4, 1(A), and 1(C) to one another, it is clear that the standing wave is generated by the waveguide-shield area defined~~formed~~ by the conductor portion~~part~~ S and

electromagnetically coupled to the suspended line ~~defined~~formed by the coupled-connection conductor 4k at a position where the electric-field intensity of the standing wave increases to a maximum value. That is to say, a distance L_d between the conductor ~~portion~~part S ~~defining~~forming the shield area and the coupling-line conductor 4k is determined so that the coupling-line conductor 4k is provided at a predetermined position where the electric-field distribution of the standing wave has ~~shows~~ a maximum value.

The generation of the above-described standing wave is affected by the positions of ends of the dielectric strips 6 and 7. Therefore, the distance between the ends of the dielectric strips 6 and 7, and the coupling-line conductor 4k is determined so that the coupling-line conductor 4k is provided at a position where the electric-field-intensity distribution of the standing wave has ~~shows~~ the maximum value. However, variations in the distance between the ends of the dielectric strips 6 and 7, and the coupling-line conductor 4k exert a relatively small influence on the standing-wave generation. Therefore, the assembly precision of the dielectric strips 6 and 7, and the dielectric substrate 3 with reference to the conductor plates 1 and 2 may be low.

The mode of the above-described suspended line is converted to the mode of the micro-strip line ~~defined~~formed by the

transmission-line conductor 4a so that electromagnetic waves are propagated in order.

Fig. 5 shows the result of reflection characteristic S11 in the line-conversion ~~portion part~~. As shown in this drawing, a low-reflection characteristic of under about -40 dB is obtained in a 76-GHz band. Subsequently, it becomes possible to provide a line converter ~~having~~showing high line-conversion efficiency.

Next, a line converter according to a second preferred embodiment of the present invention will be described with reference to Figs. 6 and 7.

The line converter according to the second preferred embodiment performs line conversion between a hollow rectangular waveguide tube and a plane circuit. Fig. 6(C) is a plan view of the line converter after an upper conductor plate is removed therefrom. Fig. 6(A) is a right-side elevational view of the line converter, where the upper conductor plate is mounted thereon, and Fig. 6(B) is a sectional view of a B-B' portion of the line converter shown in Fig. 6(C), where the upper conductor plate is mounted on the line converter, as in the case of Fig. 6(A).

Here, reference numeral 1 denotes a lower conductor plate, reference numeral 2 denotes the upper conductor plate, and reference numeral 3 denotes a dielectric substrate. The dielectric substrate 3 is arranged~~provided~~, so as to be

sandwiched between the lower conductor plate 1 and the upper conductor plate 2.

Fig. 7 shows exploded plan views illustrating the configuration of each element and portion~~part~~ of the line converter. Fig. 7(A) shows the top surface of the upper conductor plate 2, Fig. 7(B) shows the top surface of the dielectric substrate 3, Fig. 7(C) shows a conductor pattern on the undersurface side of the dielectric substrate 3, and Fig. 7(D) is a plan view of the lower conductor plate 1.

A three-dimensional-waveguide groove G11 is provided on the lower conductor plate 1 and a three-dimensional-waveguide groove G21 is provided on the upper conductor plate 2. By overlaying the two conductor plates 1 and 2 one another, the two three-dimensional-waveguide grooves are opposed to each other. Subsequently, the hollow rectangular waveguide tube (hereinafter simply referred to as a "waveguide tube") is formed.

Unlike the first preferred embodiment, the waveguide tube has a pass-through configuration in predetermined areas shown in Figs. 6 and 7 so that no dielectric material is filled therein.

A predetermined plane of the waveguide tube is determined to be a plane E (a conductor plane that is substantially parallel to the electric field of a TE₁₀ mode that is the mode of a propagating electromagnetic wave), where the plane E is substantially parallel to the lower conductor plate 1 and the

upper conductor plate 2. Therefore, the dielectric substrate 3 is provided at a position that is substantially parallel to the plane E of the waveguide tube and that corresponds to the approximately central portion~~nearly-center-part~~ of the waveguide tube (a portion~~part~~ between the lower conductor plate 1 and the upper conductor plate 2).

A transmission-line conductor 4a and a coupling-line conductor 4k continuing therefrom are disposed~~formed~~ on the undersurface of the dielectric substrate 3 (the side facing the lower conductor plate 1). A ground conductor 5g is disposed~~formed~~ on the top surface of the dielectric substrate 3 (the side facing the upper conductor plate 2). The transmission-line conductor 4a disposed~~formed~~ on the dielectric substrate 3 and the ground conductor 5g disposed~~formed~~ on the plane facing the transmission-line conductor 4a define~~form~~ a micro-strip line. In this preferred embodiment, the ground conductor 5g is provided~~formed~~ only on the top-surface side of the dielectric substrate 3.

A notch portion~~part~~ is formed in~~on~~ the ground conductor 5g, as indicated by reference character N shown in Fig. 2(B). The coupling-line conductor 4k facing the notch portion~~part~~ N, the dielectric substrate 3, the lower conductor plate 1, and the upper conductor plate 2 define~~form~~ a suspended line.

When~~Where~~ the dielectric substrate 3 is sandwiched between

the two conductor plates 1 and 2, as is the case with the first preferred embodiment, the dielectric substrate 3 is provided at a predetermined position with reference to the conductor plates 1 and 2 so that the coupling-line conductor 4k is inserted in the waveguide in a predetermined direction that is substantially perpendicular~~orthogonal~~ to the electromagnetic-wave-propagation direction of the waveguide tube. At the same time, the dielectric substrate 3 is provided at a predetermined position so that the ground conductor 5g is inserted in the approximately central portion~~nearly-center part~~ of the waveguide tube, so as to be substantially parallel to the plane E. A waveguide-shield area of the waveguide is defined~~formed~~ by a predetermined portion~~part~~ designated by reference character S shown in Fig. 6 of the ground conductor 5g. The portion~~part~~ indicated by reference character S is a conductor portion defining~~part forming~~ the shield area.

According to the above-described configuration, line conversion between the hollow waveguide tube and the plane circuit can be achieved.

Further, according to the first and second preferred embodiments, the coupling-line conductor, the transmission-line conductor, and the ground conductors are preferably located~~formed~~ on the surfaces of the dielectric substrate 3. However, some ~~part of or all~~ the conductors may be disposed~~formed~~ inside the

dielectric substrate (internal layers).

Further, the dielectric-filled waveguide is preferably used in the first preferred embodiment, as the three-dimensional waveguide, and the hollow waveguide tube is preferably used in the second preferred embodiment, as the three-dimensional waveguide. However, a dielectric line including a dielectric strip sandwiched between parallel conductor planes may be formed. Particularly, a non-radiative dielectric line may be formed.

Next, the configuration of a high-frequency module according to a third preferred embodiment will be described with reference to Fig. 8.

Fig. 8 is a block diagram showing the configuration of the high-frequency module according to the third preferred embodiment of the present invention.

In Fig. 8, reference characters ANT denote a transmission/reception antenna, reference characters Cir denote a circulator, each of reference characters BPFa and BPFb denotes a band-pass filter, each of reference characters AMPa and AMPb denotes an amplifier circuit, each of reference characters MIXa and MIXb denotes a mixer, reference characters OSC denote an oscillator, reference characters SYN denote a synthesizer, and reference characters IF denote an intermediate-frequency signal.

The MIXa mixes an input IF signal and a signal output from the SYN, the BPFa makes only a predetermined signal of the mixed

output signals transmitted from the MIXa pass, where the predetermined signal corresponds to a transmission-frequency band. The AMPa amplifies the electrical power of the signal and transmits the signal from the ANT via the Cir. The AMPb amplifies reception signals taken from the Cir. The BPFb allows ~~makes~~ only a predetermined signal of the reception signals transmitted from the AMPb to pass, where the predetermined signal corresponds to a reception-frequency band. The MIXb mixes a frequency signal transmitted from the SYN and the reception signal, and outputs an intermediate-frequency signal IF.

A predetermined high-frequency component including the line converter according to the first preferred embodiment, or the second preferred embodiment can be used, as the amplifier circuits AMPa and AMPb shown in Fig. 8. That is to say, the dielectric-filled waveguide or the hollow waveguide is preferably used, as the transmission line, and the plane circuit including an amplifier circuit provided on the dielectric substrate is preferably used. By using the high-frequency component including the amplifier circuits and the line converter, a high-frequency module with a low loss and good communication performance is obtained.

Next, the configuration of a communication device according to a fourth preferred embodiment of the present invention will be described with reference to Fig. 9.

Fig. 9 is a block diagram showing the configuration of the communication device according to the fourth preferred embodiment. The communication device preferably includes the high-frequency module shown in Fig. 8 and a predetermined signal-processing circuit. The signal-processing circuit shown in Fig. 9 includes an encoding-and-decoding circuit, a synchronization-control circuit, a modulator, a demodulator, a CPU, and so forth, and further includes a circuit for inputting and outputting transmission and reception signals to and from the signal-processing circuit. Thus, the communication device including the high-frequency module is provided and the ~~formed, where the~~ high-frequency module is used, as a unit for transmitting and receiving an electromagnetic wave.

Thus, by using the above-described line converter for performing line conversion between the three-dimensional waveguide and the plane circuit, and the high-frequency module using the line converter, a communication device with a low loss and good communication performance is provided~~formed~~.

As has been described above, various preferred embodiments ~~of,~~ the present invention enable ~~allows forming~~ a shield area of a three-dimensional waveguide to be defined by using a conductor pattern of a dielectric substrate. Therefore, the positional relationship between a conductor portion ~~part~~ on the dielectric-substrate side, where the conductor portion defines ~~part forms~~ the

shield area of the three-dimensional waveguide, and a coupling-line ~~portion~~~~part~~ electromagnetically-coupled to a standing wave generated in the shield area can be determined only by the precision of forming the conductor pattern with reference to the dielectric substrate.

Subsequently, it becomes possible to obtain a stable coupling characteristic and a line-conversion characteristic according to a predetermined design, without being affected by the precision of assembling the three-dimensional waveguide and the plane circuit.

Further, according to various preferred embodiments of the present invention, the conductor ~~portion defining~~~~part creating~~ the shield area includes ~~is formed, as~~ ground conductors disposed~~formed~~ on both surfaces of the dielectric substrate. Therefore, the shielding effect of the three-dimensional waveguide increases and the size of the line converter decreases.

Further, according to various preferred embodiments of the present invention, conduction is established between the ground conductors by using conduction paths. The conduction paths are formed on at least one of both sides of the transmission line, so as to be spaced away from the transmission line by as much as a predetermined distance and on both the surfaces of the dielectric substrate, so as to be arranged ~~provided~~ along the transmission line. Subsequently, the coupling line and the transmission line

are hardly coupled with a spurious mode, so that a good spurious characteristic can be obtained.

Further, according to various preferred embodiments of the present invention, a space is provided in the conductor of the three-dimensional waveguide, so as to define~~form~~ a choke, where the space is provided at a predetermined distance from the three-dimensional waveguide, so as to be substantially parallel to the electromagnetic-wave propagation direction of the three-dimensional waveguide. Subsequently, where the two conductor plates are joined together and the three-dimensional waveguide is provided~~formed~~, the radiated electrical-power loss of the three-dimensional waveguide decreases.

Further, other preferred embodiments of the present invention provide~~provides~~ a low-loss high-frequency module including a line converter and a high-frequency circuit connected to a plane circuit and a three-dimensional waveguide of the line converter.

Further, another preferred embodiment of the present invention provides a communication device with decreased losses caused by line conversion and a suitable communication characteristic.

~~Industrial Applicability~~

As has been described, according to the line converter of

various preferred embodiments of the present invention, the
characteristic of coupling between the plane circuit and the
three-dimensional waveguide that are provided~~formed~~ on the
dielectric substrate is not affected by the precision of
assembling the plane circuit and the three-dimensional waveguide
so that a line-conversion characteristic according to a
predetermined design can be easily obtained. Therefore, the line
converter can be used for a high-frequency module and a
communication device used for at least one of a microwave band
and a millimeter-wave band, for example.

While the present invention has been described with respect
to preferred embodiments, it will be apparent to those skilled in
the art that the disclosed invention may be modified in numerous
ways and may assume many embodiments other than those specifically
set out and described above. Accordingly, it is intended by the
appended claims to cover all modifications of the invention which
fall within the true spirit and scope of the invention.